

Name of work : Construction of New Drain at INKEL Business Park, Angamaly

INKEL LIMITED

1st Floor, Ajiyal Complex,
Kakkanad, Cochin – 682030
(Phone: 0484 - 2978101)

No. NIQ/INKEL/EKM/2025-26/208

Date: 02nd August 2025

NOTICE INVITING QUOTATION

Name of Work: Construction of New Drain at INKEL Business Park, Angamaly

Sealed quotations are invited by INKEL Limited on behalf of INKEL-KSIDC Project Limited (INKID), having its registered office at 1st Floor, Ajiyal Complex, Kakkanad, Cochin 682030, so as to reach the undersigned on or before **16/08/2025** up to 2.30 pm for carrying out Construction of New Drain at INKEL Business Park, Angamaly. The quotations received will be opened at 3.30 pm on the same day. The description of works to be carried out is listed in the attached Bill of Quantities. The rates quoted shall be final and all-inclusive and nothing extra will be paid on any account.

PAC – Rs. 4,53,946/-

Specific Conditions

1. Eligibility Criteria

The intending bidders shall be a registered civil contractor of Class ‘C’ and above in Kerala Public Works Department. Bids of ineligible applicants shall be summarily rejected.

2. Issue Of Quotation

The intending bidder, who has the requisite experience in this field can download the quotation form from our website www.inkel.in

3. Item Rate Contract

This work shall be item rate contract inclusive of all taxes. The contractor’s rate must be firm and include the cost of transportation of materials to the site.

4. Location of Site – INKEL Business Park, Angamaly

5. The intending bidders should visit the site before submission of quotation. For site visit, contact Ph- 6238229650

6. The successful bidder has to sign an agreement with M/s INKEL Limited on non-judicial stamp paper worth Rs.500/- within 7 days of receipt of the acceptance letter.

7. Performance Guarantee and Performance Security Deposit

7.1 The successful bidder within 7 days of receipt of the acceptance letter is required to submit an irrevocable Performance Guarantee of 5% of the total quoted amount in the form of DD/BG in

Name of work : Construction of New Drain at INKEL Business Park, Angamaly

favour of M/s INKEL Limited, payable at Cochin –682030. The performance guarantee shall be released upon completion of work.

7.2 The performance guarantee will be refunded after recording of the completion certificate of the work by the Engineer-in-charge.

8. Period Of Construction

The period of contract shall be **45 days**. Commencement of the work shall be considered from the 7th day of receipt of acceptance letter.

9. All Inclusive Rates

The contractor's rate must be firm and include the cost of transportation, loading/unloading of materials to the site, statutory levies & applicable cess etc. and the fixing or placing in position for which the item of work is intended to be operated. **The rates quoted by the contractor shall be firm throughout the contract period and there shall be no upward revision of the rates quoted by the contractor for any reasons whatsoever.**

The quantities indicated in Schedule of Quantities are tentative and may vary according to the site conditions.

10. Compensation For Delay

10.1 A penalty of INR 1000/ day shall be withheld from the contractor for delay in completion of work. The withheld amount shall be released if the completion of whole of works is finished as per the above period of completion.

10.2 However, the total compensation for delay deductible against Liquidated Damages (LD) whether for non-achievement of milestone or for final completion shall not exceed 10% of the contract value.

10.3 INKEL Limited reserves the right to rescind the contract if the contractor fails to start the work within 1/8th of stipulated time or fails to complete the work within the stipulated time, after serving 7 days notice to this effect by INKEL Limited and the balance works will be executed at the risk and cost of the contractor.

11. Defects Liability Period

Any defect developed within the Defect Liability Period of **six months** will have to be rectified by the contractor at their own cost and in case the defects are not rectified by the contractor, INKEL or its authorized representative shall get the work done at the risk and cost of the contractor.

12. Co-Ordination Of Work

The contractor must co-ordinate with other contractors involved in other related works within the site to minimize the disruption of continuous works.

13. Insurance

Contractor has to obtain Workmen's Compensation policy for the workmen deployed and INKEL shall not be responsible for any loss suffered during the execution of work.

Name of work : Construction of New Drain at INKEL Business Park, Angamaly

14. Water And Electricity

The contractor shall make his own arrangement for water and electricity required for the work. INKEL shall take no responsibility for the supply of either electricity or water.

15. The site should be kept clean and the surplus materials and unwanted debris should be removed / disposed to a proper place by the contractor or moved to a location as directed by INKEL.

16. Payment terms

All payments will be processed within 15 days thereof on submission of correct invoice and bill based on the joint site measurements, along with the payment certificate issued by Project Manager, INKEL. Also along with your Invoice you should submit details of proof of ESI& EPF remittance of the workers engaged for this work, ECR Challan, Wage Register, Muster Roll Copy register of each employees worked for the assignment as certified by Project Manager, INKEL.

Managing Director
INKEL Limited
Cochin –682030

Name of work : Construction of New Drain at INKEL Business Park, Angamaly

SCHEDULE OF QUANTITIES

Sl No	Description of Item	Unit	Quantity	Rate	Amount
1	Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including getting out and disposal of excavated earth lead upto 50 m and lift upto 1.5 m, as directed by Engineer-in-charge. All kinds of soil	Cum	24.548		
2	Earth work in excavation by mechanical means (Hydraulic excavator) /manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, lift up to 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m. All kinds of soil	Cum	29.325		
2	Extra for every additional lift 1.5 m or part there of in excavation / banking excavated or stacked materials. All kinds of soil	Cum	2.888		
3	Plain cement concrete 1:3:6 mix with crushed stone aggregate 40 mm nominal size mechanically mixed, placed in foundation and compacted by vibration including curing for 14 days	Cum	2.576		
4	Providing and laying in position specified grade of reinforced cement concrete, excluding the cost of centering, shuttering, finishing and reinforcement - All work up to plinth level: 1:1:5:3 (1 cement 1.5 coarse sand :3 graded stone aggregate 20 mm nominal size	Cum	12.78		
5	Centering and shuttering including strutting, etc. and removal of form for: Foundations, footings, bases of columns, etc for mass concrete	Sqm	10.34		
6	Centering and shuttering including strutting, etc. and removal of form for: Walls (any thickness) including attached pilasters, buttresses, plinth and string courses etc.	Sqm	85.941		

Name of work : Construction of New Drain at INKEL Business Park, Angamaly

7	Centering and shuttering including strutting, etc. and removal of form for: Suspended floors, roofs, landings, balconies and access platform	Sqm	3.39		
8	Steel reinforcement for R.C.C work including straightening, cutting, bending, placing in position and binding all complete upto plinth level Thermo - Mechanically Treated bars of grade Fe-500D or more	KG	1150.20		
9	Supplying and packing 20 to 75mm stone aggregate allround the collection pit including watering, ramming, consolidating and dressing complete including lead, lift, stacking, transportation etc. as directed by the Engineer in charge	cum	2.352		
9	Supplying and fixing C.I manhole cover with frame for Collection pit: 900x600 mm the weight of the cover to be not less than 170 kg	each	1		
10	Hire and running charges of JCB, tipper, labour for clearing the existing drain	Job	1		
Total Amount					
GST 18%					
Total Amount (incl. GST)					

Place:

Signature of the Contractor:


Issue No.00 / Date: 15-01-24
Revn. No.00/Date: NA

NOTICE INVITING QUOTATION

FORM#IL/QA/TEN/02
Page 6 of 8

Name of work : Construction of New Drain at INKEL Business Park, Angamaly

Diagrammatic representation of Proposed Collection Pit at Angamaly

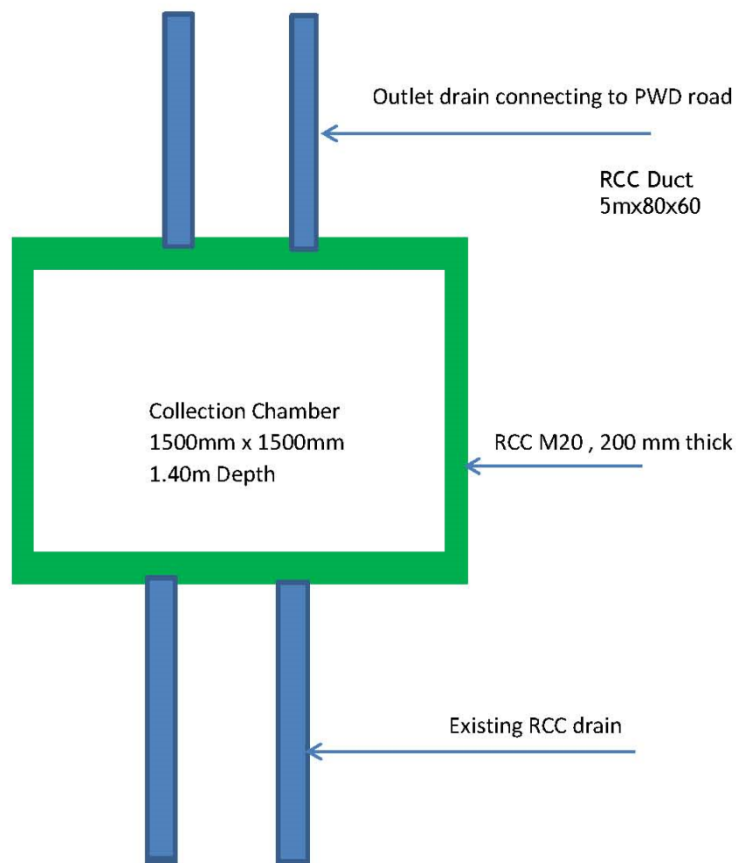

Cross section of Collection Chamber(Catch pit)

